

Cleaning System

NK.LP120

PERISTALTIC PUMPS



Main characteristics


- Variable speed 10 ÷ 100%
- Suitable for viscous liquids
- Long life of the tube
- Wall mounting with fast-coupling bracket
- fire resistant IP65 Enclosure and antacid
- On / off completely protected
- Can be customized on request
- Analog Detergent
- specific pump for dishwashers with single solenoid
- Santoprene tube replaced without tools

Cleaning System

NK.LP120- Performance data


Nk.LP 120						
FLOW RATES	PRESSURES	POWER SUPPLY	REVOLUTION DISPLAC.	FITTINGS	DIMENSIONS	WEIGHT
Variable 0,54÷7,2 l/h	1 bar	100÷240 Vac 24 Vac	2,5 ml	Ø 4x6 mm	112x90x90 mm	0,6 Kg

Installation kit

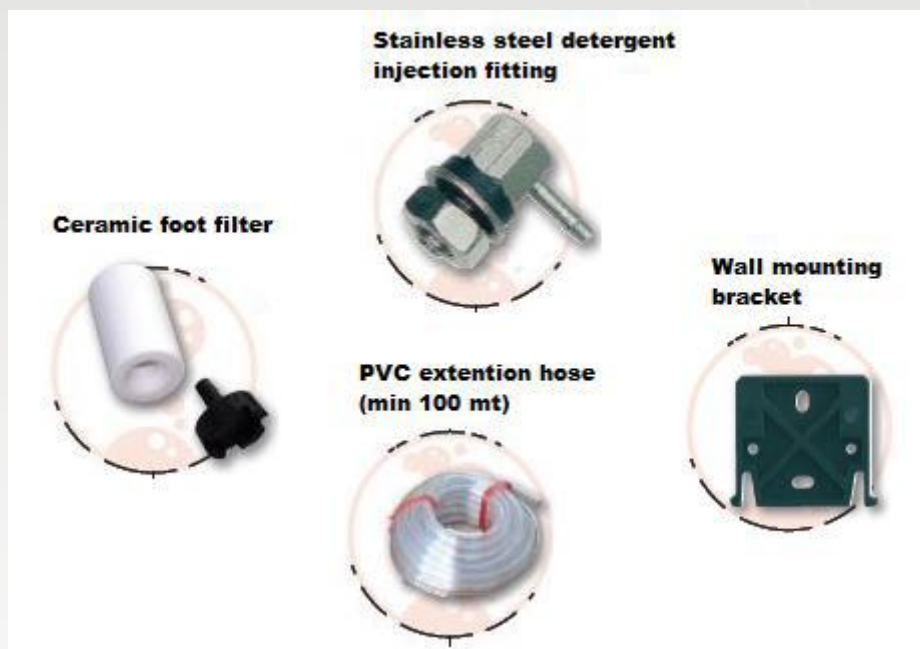

Cleaning System

Optional

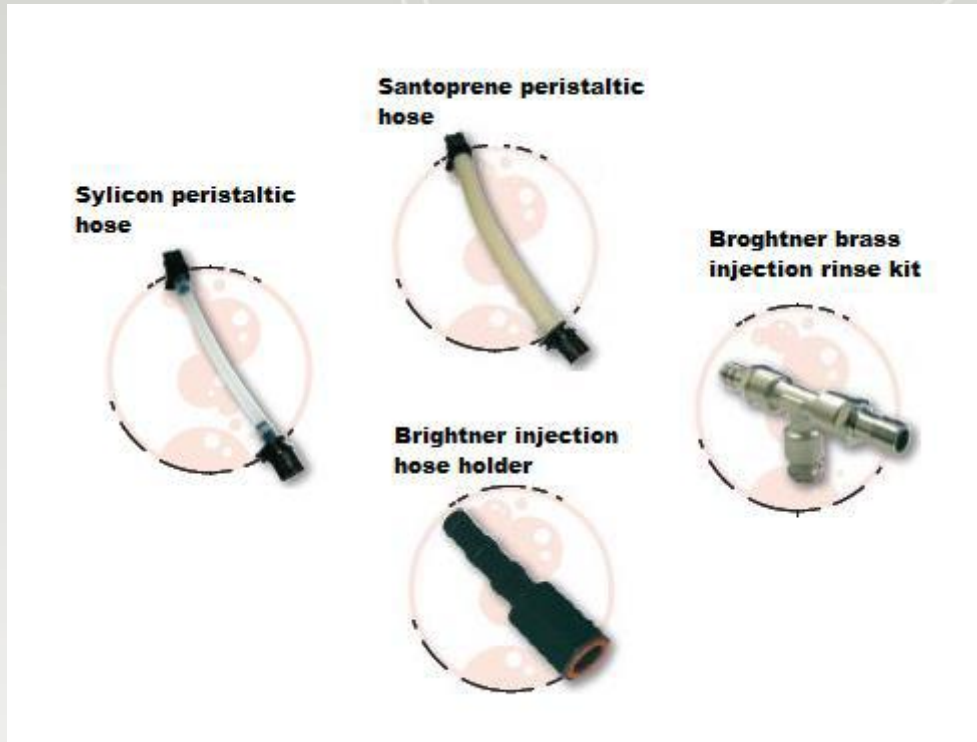

Cleaning System

NK.LP180

PERISTALTIC PUMPS



Main characteristics


- Variable speed 10 ÷ 100%
- Suitable for viscous liquids
- Long life of the tube
- Wall mounting with fast-coupling bracket
- fire resistant IP65 Enclosure and antacid
- On / off completely protected
- Can be customized on request
- Analog Detergent
- specific pump for dishwashers with single solenoid
- Santoprene tube replaced without tools

Cleaning System

NK.LP120- Performance data

Nk.LP 180						
FLOW RATES	PRESSURES	POWER SUPPLY	REVOLUTION DISPLAC.	FITTINGS	DIMENSIONS	WEIGHT
Variable 0.72÷10.8 L/h	1 bar	100÷240 Vac 24 Vac	2.5 ml	Ø 4x6 mm	112x90x90 mm	0.6 Kg

Installation kit

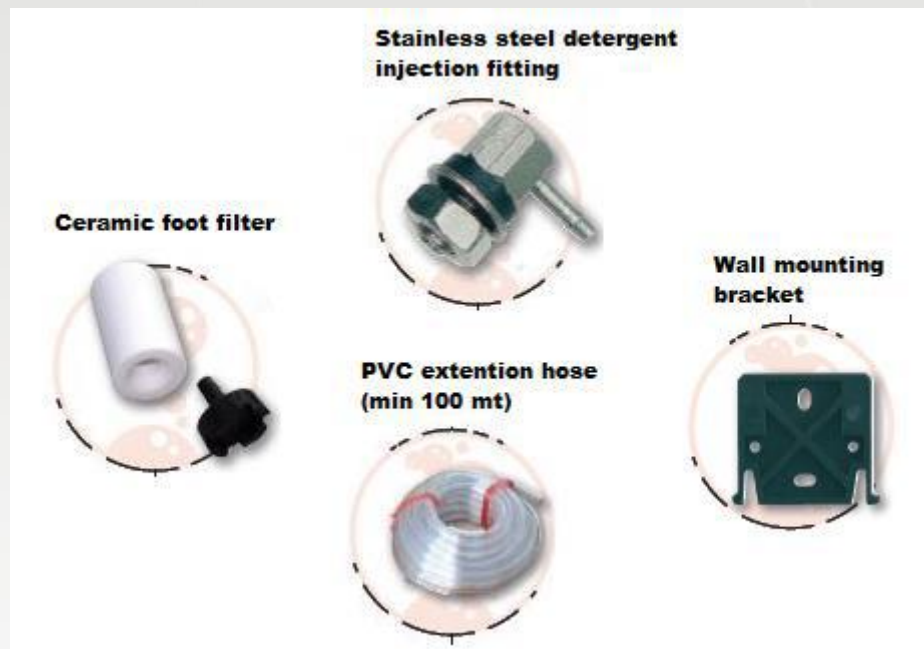

Cleaning System

Optional

